
CABCRAFT FUSION™ INTERIOR SYSTEM · PC-15 Carlyle — INTERIOR ELEVATIONS

DESIGN INTENT ONLY · NOT TO SCALE · Panel layout is fabricated to the field-verified clear inside dimensions of each cab · Finish tags are keyed to the finish schedule · Front return and door wall by the elevator contractor.


LEFT WALL ELEVATION

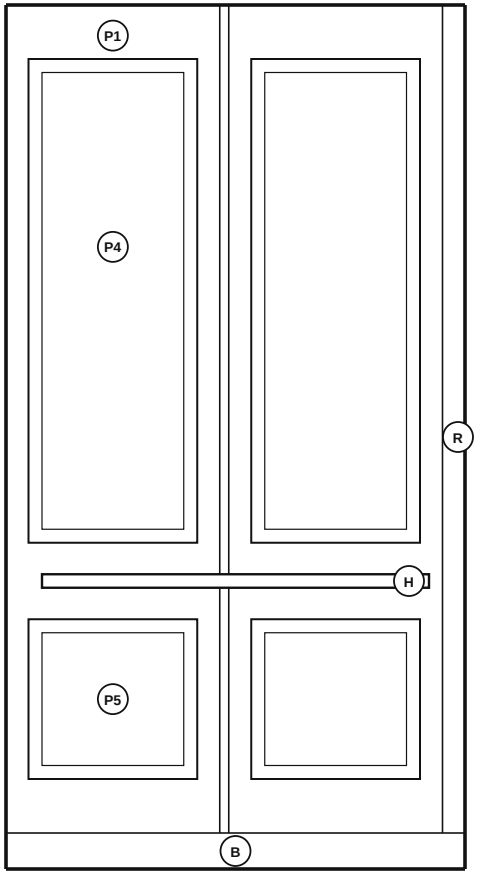

CLEAR INSIDE DEPTH (VARIES)


FRONT RETURN — REAR CORNER

REAR WALL ELEVATION

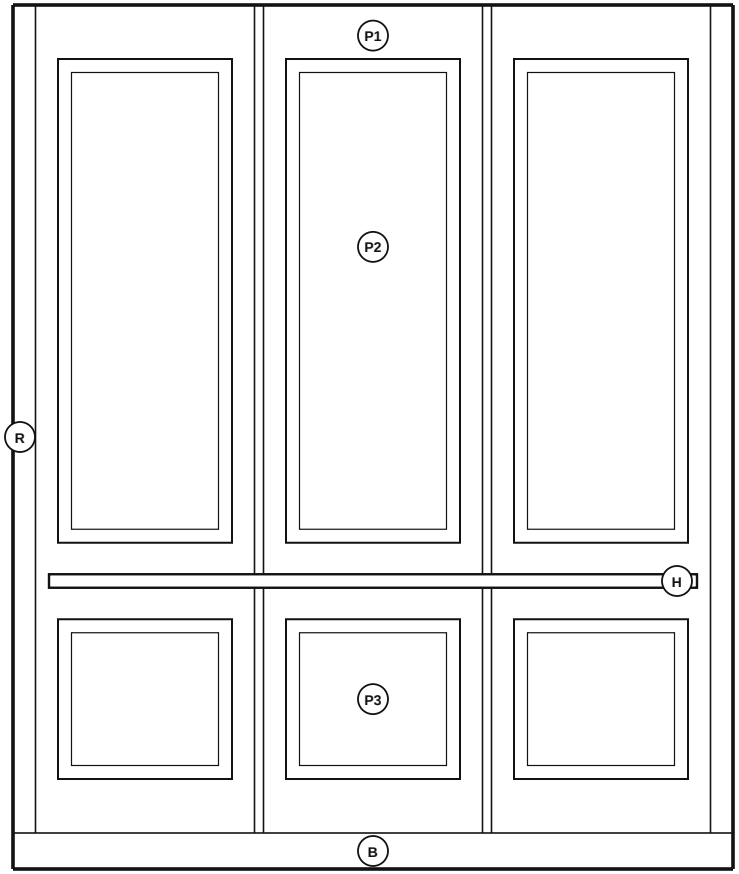

CLEAR INSIDE WIDTH (VARIES)


RIGHT WALL ELEVATION

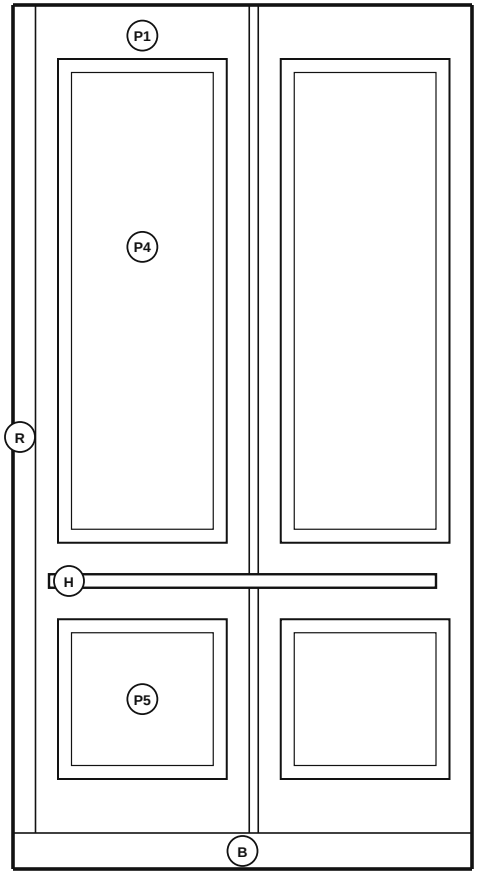

CLEAR INSIDE DEPTH (VARIES)

REAR CORNER — FRONT RETURN

REFLECTED CEILING PLAN

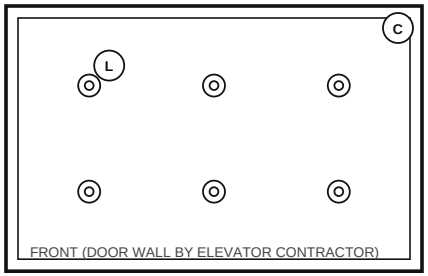

FINISH KEY

see the finish schedule for the selected finishes

- (P1) Primary panel faces — laminate or wood veneer only; moldings finish to match or contrast P1
- (P2) Upper framed panel inlay — rear wall
- (P3) Lower framed panel inlay — rear wall
- (P4) Upper framed panel inlay — side walls
- (P5) Lower framed panel inlay — side walls
- (R) Corner reveals & accent reveals
- (B) Base
- (H) Handrail (optional: flat, tube or oval)
- (C) Ceiling
- (L) Lighting

Moldings divide each full-height panel into an upper and a lower frame; the field inside any frame may carry any material (laminate, decorative metal, glass, mirror or natural stone).
No frieze — panels run to the ceiling. Reveals: 2½ in recessed corner reveals and 1 in recessed accent reveals between bays, same finish options as Fusion trim. Handrail 32 in AFF, centred between the upper and lower moldings.